

### NOTES & SPECIFICATIONS

THIS PLAN HAS BEEN PREPARED IN ACCORDANCE WITH THE RULES AND REGULATIONS OF 310 CMR 15 (TITLE V) OF THE COMMONWEALTH OF MASSACHUSETTS AND THOSE OF THE TOWN BOARD OF HEALTH.

THE REQUIRED INSPECTION SCHEDULE DURING THE PROCESS OF CONSTRUCTION SHALL BE ARRANGED BY THE CONTRACTOR WITH THE BOARD OF HEALTH & DESIGN ENGINEER PRIOR TO THE COMMENCEMENT OF CONSTRUCTION.

1500 GALLON FAST SYSTEM SEPTIC TANK AND DISTRIBUTION BOX SHALL BE STANDARD DUTY DESIGN AS MANUFACTURED BY ROTONDO & SONS, INC. OR APPROVED EQUAL.

ALL PIPING SHALL BE 4" DIA. SCHD. 40 NSF PVC, WITH ALL JOINTS SEALED WATERTIGHT.

ALL STONE SHALL BE DOUBLE WASHED AND FREE OF IRONS, CLAY OR FINES AND SHALL BE SATISFACTORY TO THE TOWN BOARD OF HEALTH.

THIS SYSTEM IS NOT DESIGNED TO ACCOMMODATE A GARBAGE DISPOSAL OR OTHER HIGH WATER USE UNITS.

THE PROPOSED SEPTIC SYSTEM IS NOT LOCATED WITHIN THE CONE OF INFLUENCE OF ANY MUNICIPAL WELL NOR ARE THERE ANY PRIVATE WELLS LOCATED WITHIN 100 FEET (RADIAL) OF THE PROPOSED SYSTEM.

EXCAVATE ALL TOP, SUB AND ANY OTHER SOILS ENCOUNTERED DOWN TO THE BOTTOM OF EXCAVATION (SEE CROSS SECTION) AND FOR A HORIZONTAL DISTANCE OF 5' ON ALL SIDES OF THE PROPOSED SYSTEM. BACK FILL TO TOP OF STONE ELEVATION WITH SELECT ON SITE OR IMPORTED SOIL MATERIALS CONSISTING OF CLEAN GRANULAR SAND, FREE OF ORGANIC MATTER OR OTHER DELETERIOUS SUBSTANCES AND MEETING THE SIEVE SIZE REQUIREMENTS OF 310 CMR 15.255(3) & (5) [CONSTRUCTION IN FILL].

ELEVATIONS SHOWN ON THIS PLAN ARE BASED ON NGVD 29.

CONTRACTOR SHALL VERIFY EXISTING CONDITIONS AND NOTIFY THE ENGINEER OF ANY DISCREPANCIES PRIOR TO THE CONTINUATION OF CONSTRUCTION.

WATER TABLE FLUCTUATES ANNUALLY, NO WARRANTY OF A DRY BASEMENT IS EXPRESSED OR IMPLIED.

THE PROPOSED WORK DOES NOT LIE IN A CRITICAL FLOOD HAZARD ZONE.

THE LOT DOES NOT LIE IN AN OVERLAY DISTRICT FOR GROUNDWATER AQUIFER PROTECTION.

THE SITE IS UNDER CONSTRUCTION, DUE TO THE POSSIBILITY OF THE BENCHMARK STAKE SHIFTING DURING CONSTRUCTION, THE CONTRACTOR IS TO VERIFY THE BENCHMARK WITH THE SURVEYOR PRIOR TO CONSTRUCTION.

MAINTAIN 15' MINIMUM SEPARATION FROM WATER SERVICE TO PROPOSED SEPTIC COMPONENTS.

HOUSE DIMENSIONS, ELEVATION AND LOCATION ARE APPROXIMATE AND SUBJECT TO CHANGE, CONTRACTOR TO VERIFY PRIOR TO CONSTRUCTION.

THE LOT LIES IN A R-1 ZONING DISTRICT.



FRONT YARD SETBACK: 35'

SIDE YARD SETBACK: 15' + 5'/STORY

REAR YARD SETBACK: 25'

REFERENCE: DEFINITIVE SUBDIVISION PLAN FOR FALL RIVER AVENUE DEVELOPMENT PARTNERS, LLC, "BANNA ESTATES" TAUNTON AVENUE/PLEASANT STREET, SEEKONK, MA. DATED; AUGUST 2, 2007, REVISED; MAY 27, 2008. BY INSITE ENGINEERING SERVICES, LLC. AND "NOTICE OF INTENT PLAN OF BANNA ESTATES" REVISED; MAY 12, 2008.

THE 25-FOOT BUFFER ZONE DELINEATES THE LIMITS OF DISTURBANCE AND ALL FUTURE ACTIVITIES THE 50-FOOT WETLAND BUFFER DELINEATES THE LIMITS OF ALL STRUCTURES AS STATED WITHIN THE TOWN OF SEEKONK CONSERVATION COMMISSION REGULATIONS AMENDED MARCH, 2003

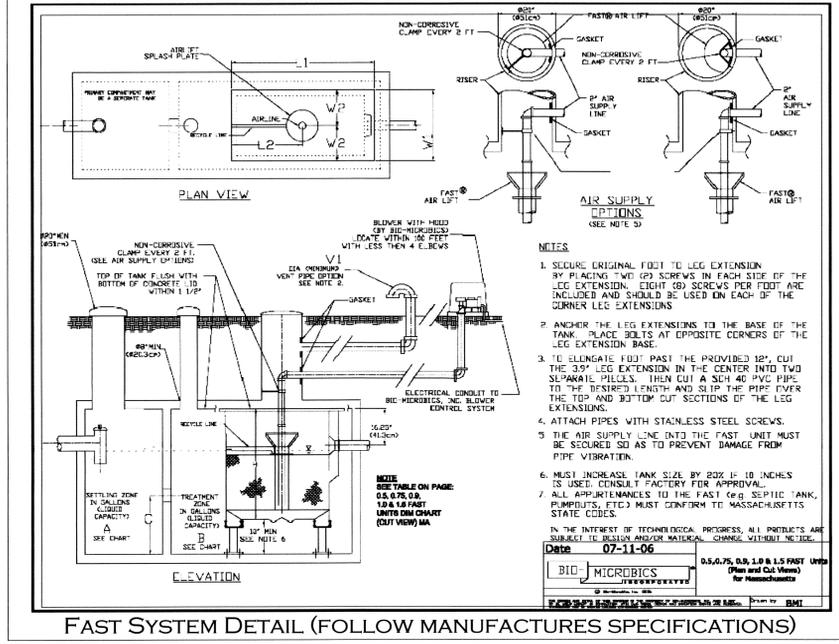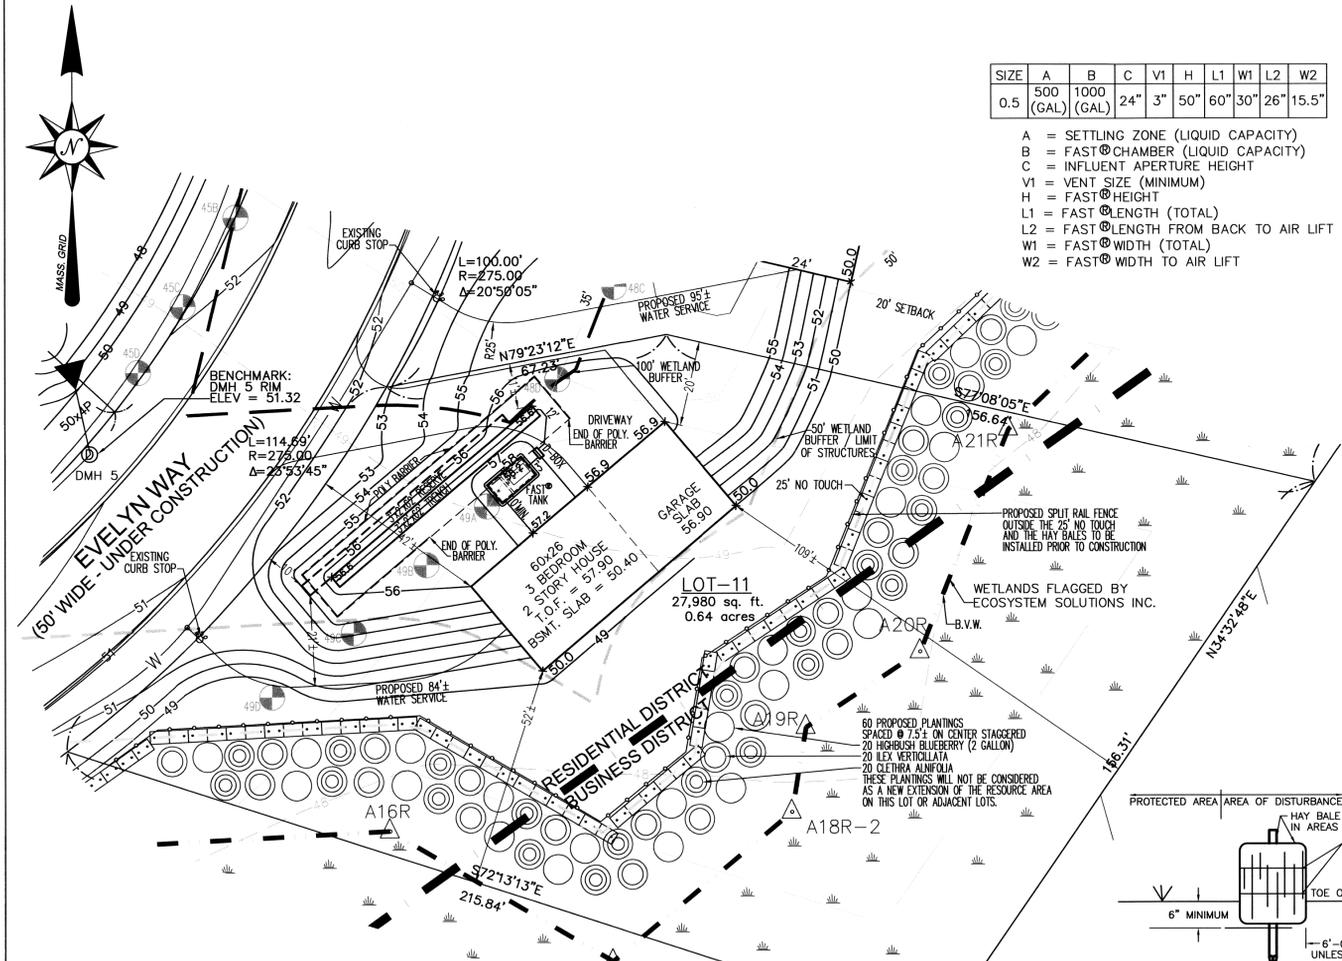

### SOIL OBSERVATION & PERC RESULTS

DEPTH	HORIZON	TEXTURE	COLOR	MOTTLING	OTHER
0-8"	A	SL	10 YR 3/2	-	-
8-16"	B	LS	10 YR 5/4	-	-
16-120"	C	S	2.5 Y 6/4	36" 7.5 YR 5/8	-
OBSERVED GROUND WATER: 36" STANDING, 36" WEEPING DATE: 1-9-07					
ESTIMATED HIGH GROUND WATER: 36" BY: M. FARIA					
PERC. RATE @ 36" = < 2 MPI WITNESS: H. CHENEVERT					

DEPTH	HORIZON	TEXTURE	COLOR	MOTTLING	OTHER
0-8"	A	SL	10 YR 3/2	-	-
8-16"	B	LS	10 YR 5/4	-	-
16-120"	C	S	2.5 Y 6/4	36" 7.5 YR 5/8	-
OBSERVED GROUND WATER: 36" STANDING, 36" WEEPING DATE: 1-9-07					
ESTIMATED HIGH GROUND WATER: 36" BY: M. FARIA					
NO PERC. TEST PERFORMED WITNESS: H. CHENEVERT					

DEPTH	HORIZON	TEXTURE	COLOR	MOTTLING	OTHER
0-8"	A	SL	10 YR 3/2	-	-
8-16"	B	LS	10 YR 5/4	-	-
16-120"	C	S	2.5 Y 6/4	36" 7.5 YR 5/8	-
OBSERVED GROUND WATER: 36" STANDING, 36" WEEPING DATE: 1-9-07					
ESTIMATED HIGH GROUND WATER: 36" BY: M. FARIA					
PERC. RATE @ 36" = 2 MPI WITNESS: H. CHENEVERT					

DEPTH	HORIZON	TEXTURE	COLOR	MOTTLING	OTHER
0-8"	A	SL	10 YR 3/2	-	-
8-16"	B	LS	10 YR 5/4	-	-
16-120"	C	S	2.5 Y 6/4	44" 7.5 YR 5/8	-
OBSERVED GROUND WATER: 44" STANDING, 44" WEEPING DATE: 1-9-07					
ESTIMATED HIGH GROUND WATER: 44" BY: M. FARIA					
NO PERC. TEST PERFORMED WITNESS: H. CHENEVERT					

### SEPTIC SYSTEM DESIGN PLAN AND NOTICE OF INTENT PLAN

**"BANNA ESTATES"**

#7 EVELYN WAY, SEEKONK, MA. 02771  
AP 20 LOT 62 (SUBDIVISION LOT 11)

Applicant: **PETRA BUILDING CORP.**  
**STEVEN NAJAS**  
111 MILES AVENUE, EAST PROVIDENCE, RI 02914

Job #: 06-050-11    Scale: 1"=20'    Design By: MSF    Date: JUNE 18, 2009

Revised: SEPTEMBER 1, 2009 ADJUSTED BUFFER NOTES

PROFESSIONAL SEAL

**INSITE**  
Engineering Services, LLC

PROFESSIONAL ENGINEERS AND LAND SURVEYORS  
INSITE PROFESSIONAL COMPLEX, SUITE 1  
1539 FALL RIVER AVENUE  
SEEKONK, MA 02771  
PHONE: (508) 336-4500  
FAX: (508) 336-4558

SHEET 1 OF 1

I:\06-050 Taunton Ave - Pleasant Street (CADD)\06-050 SEPTIC 9-17-06.dwg, SEP & NOI LOT 11, 9/1/2009 11:12:24 AM