


FLOOD ZONE A - ELEV NOT DETERMINED ON F.I.R.M.
 COMMUNITY PANEL 250063 0005 A - SEPT. 5, 1979
 FLOOD ZONE C - AREAS OF MINIMAL FLOODING

WETLANDS FLAGGING BY
 ENVIRONMENTAL RESEARCH
 CORP., APRIL 5, 2000 AND
 CONFIRMED IN THE FIELD BY
 E.R.C. ON JANUARY 5, 2005

PROSPECT STREET

WOODWARD AVENUE

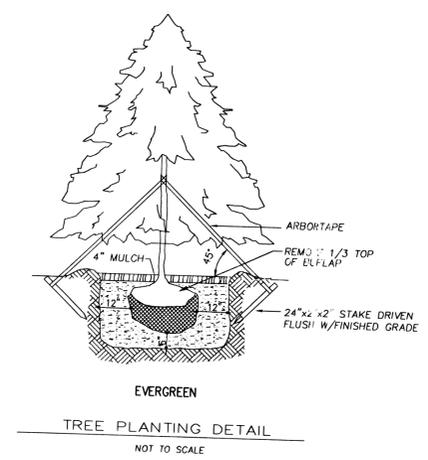

ZONING DATA



ZONE: R4 - RESIDENTIAL DISTRICT
 BUILDING SETBACKS: FRONT - 50 FEET
 SIDE - 35 FEET
 REAR - 80 FEET

AYOUB ENGINEERING EXPRESSLY DISCLAIMS ANY RESPONSIBILITY FOR MONITORING, INSPECTING, OBSERVING, OR SUPERVISING CONSTRUCTION SERVICES, OR THE MEANS, METHODS, SEQUENCES AND TECHNIQUES OF CONSTRUCTION OR FOR JOB SITE SAFETY AND PROGRAMS FOR THE PROJECT DESIGNED BY THE PLANS FOR WHICH THIS CERTIFICATION IS AFFIXED. AYOUB HAS NOT BEEN RETAINED FOR NOR SHALL IT HAVE ANY CONTROL OVER OR BE IN CHARGE OF ACTS OR OMISSIONS OF ANY CONTRACTOR, SUBCONTRACTOR, OTHER AGENTS OR EMPLOYEES OR OF ANY OTHER PERSONS PERFORMING PORTIONS OF THE WORK.

REFERENCE:
 PROPERTY LINES AND OTHER TOPOGRAPHIC INFORMATION SHOWN ON THIS DRAWING WERE FROM THE SEEKONK PLAT MAPS AND A DRAWING (DATED: 9/6/01) PROVIDED BY: OUTERLIMITS SURVEY, INC. 128 MAIN ST., UNIT AA CARVER, MA 02330.



KEY	BOTANICAL NAME	COMMON NAME	QTY	SIZE	ROOT
RM	RHODODENDRON MAXIMUM	ROSEBAY RHODODENDRON	17	2'-3'	B + B
IG	ILEX GLABRA	INKBERRY	9	2'-3'	B + B
VA	VACCINIUM AUGUSTIFOLIUM	LOWBUSH BLUEBERRY	73	18"-24"	1 GAL
MP	MYRICA PENNSYLVANICA	BAYBERRY	82	18"-24"	2 GAL
VD	VIBURNUM DENTATUM	ARROWWOOD	11	2'-3'	B + B
CS	CORNUS SIRECEA	REDTIG DOGWOOD	12	2'-3'	B + B

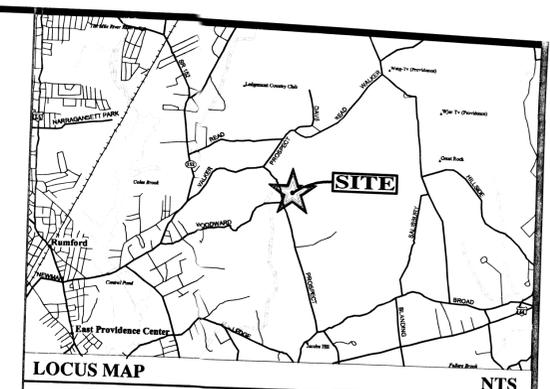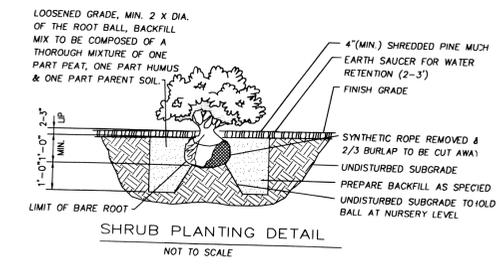

GENERAL NOTES:

- NOTES:
- ALL PLANT MATERIALS ARE TO BE FIRST QUALITY NURSERY STOCK, FREE FROM DISEASE OR OBJECTIONABLE DISFIGUREMENTS, AND PLANTED IN CONFORMANCE WITH SOUND NURSERY PRACTICE.
 - ALL NEW TREES ARE TO BE STAKED WITH CEDAR STAKES PER DETAIL, & GUYED WITH NYLON ARBORTAPE. ARBORTAPE, STAKES & TREE WRAP TO BE REMOVED BY LANDSCAPE CONTRACTOR ONE YEAR AFTER INSTALLATION.
 - AREAS SHOWN MULCHED ARE TO BE MULCHED WITH A MINIMUM 3 INCH DEPTH OF SHREDDED PINE BARK.
 - ALL PLANT MATERIALS ARE TO BE GUARANTEED FOR TWO YEARS TO BE IN HEALTHY & VIGOROUS CONDITION. IT IS UNDERSTOOD THAT THE OWNER WILL PROVIDE ADEQUATE AND TIMELY CARE DURING THE GUARANTEE PERIOD.
 - ALL PLANTING PITS ARE TO RECEIVE 3 AGRIFORM TABS (3-YEAR FERTILIZER) AT TIME OF PLANTING.
 - PLANTS ARRANGED IN CONTINUOUS GROUPING ARE TO BE SET IN MULCHED BEDS. MULCH WILL BE A MIN. 3 INCH DEPTH OF SHREDDED PINE BARK.
 - ANY TREES OR SHRUBS DISTURBED FOR NEW WORK ARE TO BE PROTECTED AND OR REPLACED.
 - ALL EXISTING TREES AND SHRUBS INDICATED ON DRAWING ARE TO REMAIN UNLESS NOTED.
 - THE CONTRACTOR OR OWNER SHALL BE RESPONSIBLE FOR WATERING ALL PLANT MATERIAL THROUGHOUT HOT PERIODS FOR TWO YEARS OR UNTIL A SUITABLE IRRIGATION SYSTEM IS INSTALLED.

REV	PER	DATE	DESCRIPTION	BY	CHK
2	AJM	2/01/05	ADDED WETLANDS FLAG CONFIRMATION NOTE	RM	
1	JF	11/29/01	ADDED CONSTRUCTION SEQUENCE	JMK	

REVISIONS

PHILIP A. AYOUB

PROJECT ADDRESS
SEEKONK, MA
 PROSPECT STREET
 PLAT 23 LOT 13 69-564

SHEET DESCRIPTION
SITE LANDSCAPE PLAN

PREPARED BY
AYOUB ENGINEERING
 ENGINEERING & ARCHITECTURAL CONSULTANTS
 414 BENEFIT STREET, PAWTUCKET, RHODE ISLAND 02861
 PHONE: (401) 728-5533 FAX: (401) 724-1110
 E-MAIL: INFO@AYOUBENGINEERING.COM

PROJECT NO. 2789	DWN. BY: JMK	DATE: 11/19/01
CAD FILE NO. 2789MP1	CHK'D. BY:	DATE:
SCALE: 1"=20'		

L-1

PERMIT PLAN